

The Winning Force

**DURMA**

# AD-ES SERIES

## Electrical Press Brake



- Perfect Precision
- High Capacity
- Low Energy Consumption
- Elegant Design



# **DURMA** The Winning Force



As a total supplier for sheet metal manufacturing with almost 60 years of experience, Durma understands and recognizes the challenges, requirements and expectations of the industry. We strive to satisfy the ever higher demands of our customers by continuously improving our products and processes while researching and implementing the latest technologies.

In our three production plants with a total of 150.000 m<sup>2</sup>, we dedicate 1,000 employees to delivering high quality manufacturing solutions at the best performance-to-price ratio in the market.

From the innovations developed at our Research & Development Center to the technical support given by our worldwide distributors, we all have one common mission: to be your preferred partner.

Present Durmazlar machines with **DURMA** name to the world.



	<b>1</b> High technology, modern production lines	
<b>2</b> Top quality components		<b>3</b> High quality machines designed in R&D Centre

# AD-ES Series Electrical Press Brake

## Environment Friendly

DURMA AD-ES CNC PRESS BRAKE serial can provide the production starting from 1250 mm table width to 2500 table width. It is also possible to apply different sizes in line with customer demands.

Welding is performed on the machine body and upper table and all waste is prevented by stress relieving and appropriate processing technologies. Reducer drive system, precision ball screw, and nut connection, high torque-resistant bearing cylinder provide high precision bending results.




# Environment Friendly Low Cost High Gain

Precise bending results

Minimum tool change and adjustment time

Maximum speed and safety



**High Capacity**

**Robust Body**

**Perfect Precision**



**Winning**

**Ergonomic**

## Advantages

- High Energy Saving
- Decrease in operating costs
- Easy Cooling
- Operational reliability
- High availability
- Low investment cost
- System reliability
- Compliance with current technology
- Significant decrease in noise level
- Less measurement needing
- Ease of integration of control functions
- Low maintenance cost
- Compliance with European Union standards

# Energy Consumption Comparisons of Press Brakes

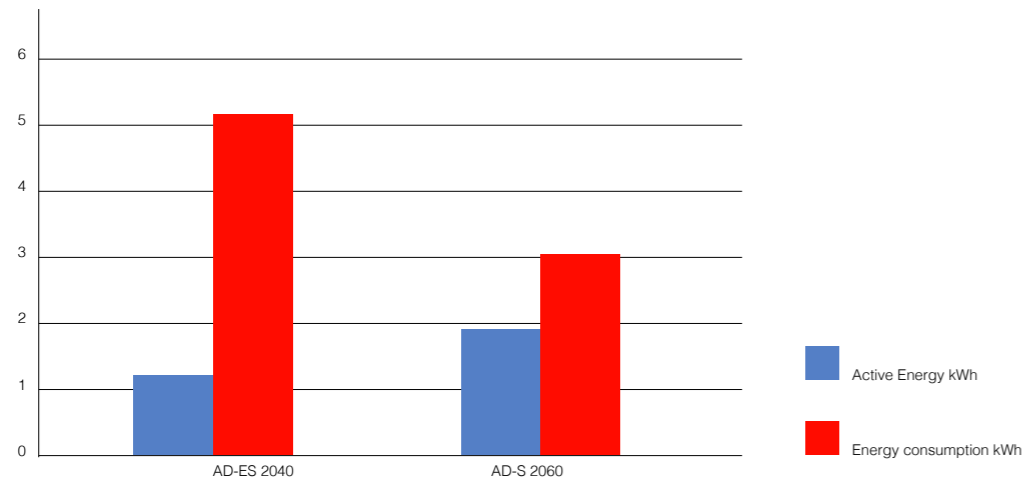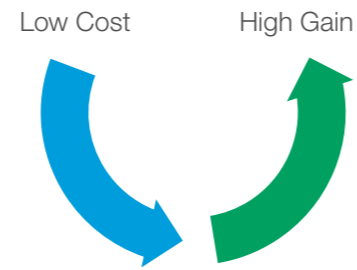

## Main Components

Servo-motor  
 Aluminum Pulley  
 Trigger Belt  
 Ball screw and nut  
 Mechanical Roller Bearing  
 Software

## Physical Features

Position Control  
 Press/Load Press Control

## Efficiency

40% Less energy consumption  
 17% more productivity

Technical Data	AD-ES 2040	AD-S 2060
Motor Power	7.2 kW	7.5 kW
Power Consumption	3.1 kWh	5.2 kWh
Oil Capacity	-	100 lt
Approach Speed	180	200
Bending Speed	10	10
Rotation Speed	180	110

## High Increase in Production Efficiency

Our AD-ES series solutions provide high energy savings to our business with speed, efficiency, quality and low power consumption.



Energy saving

Same consistency in each cycle

Economic

Repeatability at high speed



# Fast, Efficient, Modern



## General Specifications

- Precision belt-pulley system
- Upper table suitable for EURO / Wila type tools.
- Robust body structure with long life and high performance
- Electric Panels creating a safer working environment
- Servo motors providing high speed and high precision
- Ball screw and nut connection providing excellent power and motion transmission
- Back support system with Japanese Yaskawa motor and rigid aluminum body
- AP1-AP2 system with high mobility and aluminum miter
- CE Norm Safety Standards

## Strong Back Gauge System

- Precise
- Reliable
- Strong

- Fast and high accuracy
- Safe movement
- Long-life linear motion elements
- No maintenance required
- Simple to use, easy to maintain



X 650 X R (AL) Back Gauge



X 650 X R Z1 Z2 (AL) Back Gauge

### Why DURMA Back Gauge?

The most important factor that affects bending quality is the stability and the design of the back gauge.

Perfect bending, perfect product is possible with a stable and precise back gauge. High speed back gauge system moving with ballscrew is also supported with linear guides. Thus, long life, precision and strength against collisions are provided.

Back gauge finger is designed to achieve all types of bendings in the maximum stability.

- AD-ES back gauge systems are long-life, precise and strength against collisions.
- High speed back gauge system moving with ballscrew is also supported with linear guides.

# Tool Holders and Tools

The bending performance of the machine is increased by using High Quality European type clamping system and ease of use is provided. The lower body is designed as narrow for Z type bending and designed in accordance with European type tool holding system.

DURMA is your solution partner with various tool options.



European Type Standard Clamping System



European Type Tool and Holder (4V Bottom Tool) Quick Clamping




Quick Clamping System



Wila Bottom Tool Holder



Wila Top Tool Holder

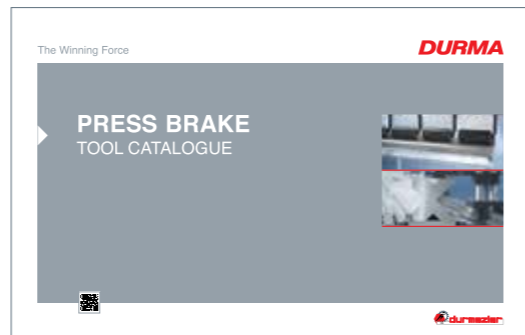

# Safe and Accurate Bends with Top Quality Equipments

## Crowning System

CNC controlled, motorized crowning system provides perfect result in each point of bending. Your bending differences arising from the material or other factors are calculated by motorized CNC crowning system and the perfect result is achieved.



CNC Crowning System

## CE Safety Systems

Our machines are designed in accordance with European CE standards and directives in order to ensure your safety with hydraulic, electric, appropriate height covers and laser light curtains. CE safety in tandem machines are provided with light barriers.



CE Laser Safety Systems

## Aluminum Sheet Support System

Strong front arm can be moved to the right and left and fixed at the desired position with linear slide and roller system. With aluminum miter and bar support, the sheet material can be easily moved to the machine.



Front Sheet Support System with Linear Slide, Aluminum Miter

# Now Bending is More Easy

On the control unit's powerful simulation screen, the bending position can be monitored instantaneously and the bending parameters can be interfered. The blanking of the parts to be bent in CNC, back gauge positions, bending order, the compatibility of the bending parts with the stroke and the dies required for bending angles are automatically performed by the control unit on condition that the material information is defined. There is also the possibility to monitor the bends in three dimensions according to the type of the control unit and whether there is any collision during the bending or not.

## ModEva 19T



- 19 "Color touch screen
- Profile drawing with touch finger
- Automatic bending list
- Easy and fast data transfer
- High efficiency
- Multiple simulation capability
- Simulation criterion for better sheet metal management
- Multi-tasking and file management with Windows XPe
- Ethernet for easy communication Offline software

## Delem-66T




- 2D Graphic touch screen and programming mode
- 3D imaging in simulation and production
- 17 "High resolution colors
- Suitable for full Windows applications Compatible with DelemModusys
- USB and peripheral interface
- User specific application support Multitasking competencies
- Sensor bending and correction interface

## DURMA Angle Measuring



## Operator table support system

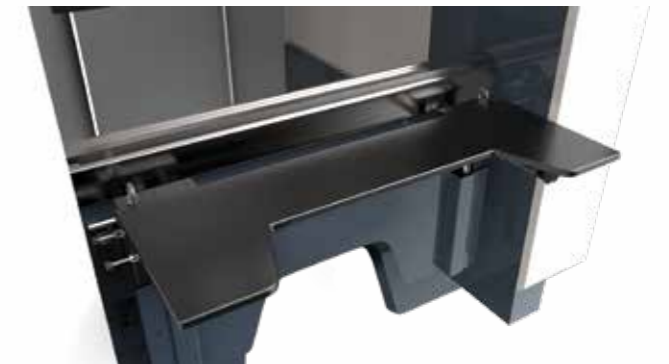

## Robotic Solutions

AD-ES series machine has component advantages with the drive system. Drive system consists of a few main parts and does not need oil for to generate press power. Machine sets up quickly and works long time with the same calibrate R-CELL Robot brand is Japan Yaskawa.

The MOTOMAN GP12 is a compact and flexible handling robot which provides a payload of 12 kg. Easy set - up and maintenance and a wrist structure with great environment resistance improve efficiency in installation, operation maintenance of equipment.



## DA-69T

- 3D and 2D graphic touch screen programming
- 3D imaging in simulation and production
- 17 "high resolution colors
- Suitable for full Windows applications Compatible with DelemModusys
- USB and peripheral interface
- Sensor bending correction interface
- Multitasking competencies
- Higher memory

# Advantages compared to classical press brakes

## Drive System Group Equipment

- Servo Motor
- Gearbox
- Mechanical Roller Bearing
- Ballscrew and Nut




## Equipment Advantages

- Simpler Drive Group
- Less Component
- Easy and Fast Assembly
- Easy and quick maintenance
- Hydraulic oil-free drive system

**Standard Hydraulic Press Brake**


**Servo Hydraulic Press Brake**

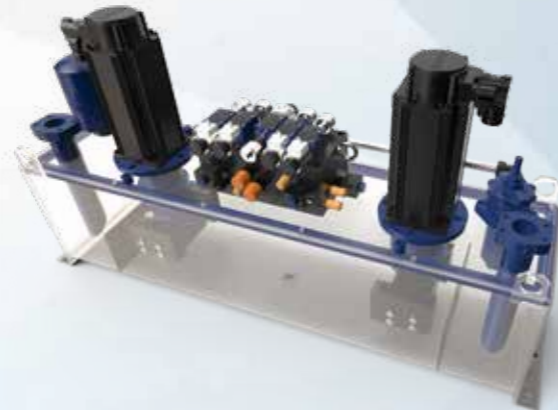

# AD-ES Series Technical Details

Machine Types	Bending Power	Bending Length	Distance Between Columns	Stroke	Daylight(D)	Working Height(F)	Approach Speed	Bending Speed	Rotation Speed	Back Gauge X axis Length	Back Gauge R axis Length	Length	Width	Height	Weight
Unit	Ton	mm	mm	mm	mm	mm	mm/sn	mm/sn	mm/sn	mm	mm	mm	mm	mm	kg
AD-ES 1240	40	1250	1300	200	440	1000	120-180	20-40*	120-180	650	250	2150	1625	2800	4500
AD-ES 2040	40	2050	2050	200	440	1000	120-180	20-40*	120-180	650	250	2870	1625	2800	5600
AD-ES 2560	60	2550	2550	200	400	1000	120-180	20-40*	120-180	650	250	3370	1875	3200	6600

\* According to CE norm, the bending speed should be maximum 10 mm / sec except for robotic use..

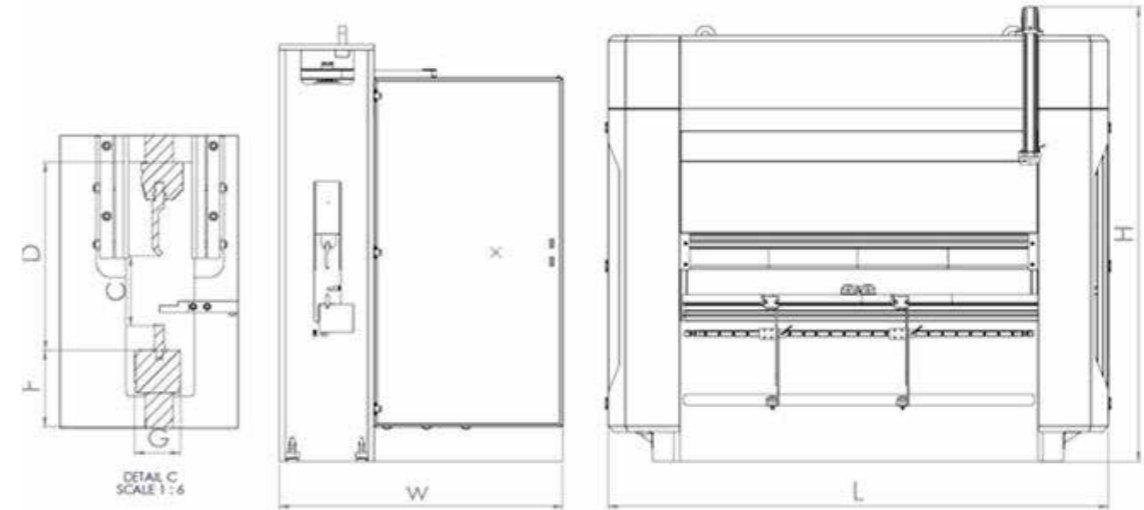

# RobotCell Technical Details

Air Pressure	5 - 7 bar
Voltage	380 - 480 V
Power Supply	1.5 Kw
Robot Maximum Lifting Force	12 Kg
R-Cell Length	1250 mm
R-Cell Width	1950 mm
R-Cell Height	2150 mm
R-Cell Weight	1100 kg



# Standard & Optional Equipment

## Standard Equipment

Control Unit - DA-69T 3D touchscreen  
 Y1, Y2, X, R (4-Axis) X=650mm Back Support (AI – Double Guide )  
 CE Motorized FIESSLER AKAS-3 M + FPSC (with Security PLC)  
 DBEND 3D bending edit and simulation  
 Servo motor back support & linear guided & ballscrew system (X-R)  
 Motorized crowning controlled via CNC Unit  
 European type tool holding system  
 Sliding Front arms - Sliding Front arms slide on full-length linear slides with T-Channel & Locking

## Optional Equipment

Control Unit - DELEM-66T  
 Control Unit - CNC ModEva19T  
 Z1, Z2 axis  
 CE Manual F.AKAS II M -FPSC-B-C Light protection (with security PLC)  
 X=650mm X,R,Z1,Z2,Delta X +/- 125mm CNC Controlled (AL)  
 X axis = 1000 mm – Back protection with light barriers  
 Laser angle measurement system  
 Quick Clamping System  
 Hydraulic and Pneumatic tool holding system  
 Upper and lower tool  
 Central lubrication system  
 Additional support finger and additional sliding front sheet metal support system  
 Special packaging for overseas countries

# Fast on Service and Spare Parts

DURMA provides the best level of service and spare parts with qualified personnel and spare parts in stock. Our experienced and professional service personnel are always ready at your service. Our professional training and application enriched courses will give you an advantage to use our machinery.



Consultancy



Spare Parts



R&D Center



After Sales Service



Service Agreements



Software



Training



Flexible Solution

**DURMA**

**DURMA**



PANEL BENDER



PUNCH



PRESS BRAKE



VARIABLE RAKE SHEAR



PLASMA



L ANGLE PROCESSING CENTER



TUBE LASER CUTTING



FIBER LASER



IRON WORKER



POWER OPERATED SHEAR



ROLL BENDING




PROFILE BENDING



CORNER NOTCHER

Today, Tomorrow and Forever with You...

V	b	r <sub>i</sub>	s(mm)																					
			0.5	0.8	1	1.2	1.5	1.8	2	2.5	3	3.5	4	4.5	5	6	7	8	9	10	12	15	18	20
6	5	1	2,5	6,5	10																			
8	6	1,3	2	5	8	11																		
10	7	1,7	1,5	4	6	9	13																	
12	9	2		3	5	7	11	16																
15	12	2,7			4	6	9	13	16															
20	15	3,3				4	7	10	12	19														
26	18	4,2					4	7,5	9	14	21													
30	22	5						6,5	8	12	19	24												
32	23	5,4						7,5	11,6	17	23	30												
37	25	5,8							10	14,5	20	26	33											
42	29	6,7								13	17	23	29	33,5										
45	32	7,5									16	21	27	33	48									
50	36	8,3										19	24	30	43	58								
60	43	10											20	25	36	49	64							
70	50	11,5												21	31	42	55	69						
80	57	13,5													27	37	48	60	75					
90	64	15														32	42	54	66	95				
100	71	17															38	48	60	86	134			
130	93	22																	37	46	66	103	149	
180	130	30																		33	48	75	107	153
200	145	33																			43	67	83	119
250	180	42																				54	77	92



$$F = \frac{1,42 \times L \times Rm \times s^2}{1000 \times V} (Ton)$$

F: Bending Force (Ton) L: Length (mm) Ri: Inside Radius (mm) Rm: Material Tensile Strength (daN/mm²) V: Channel Width (mm) B: Minimum Sheet Bending Side (mm) S: Thickness (mm)

## AD-ES SERIES

### Electrical Press Brake

**Durmazlar Makina San. ve Tic. A.Ş.**  
 OSB 75. Yıl Bulvarı Nilüfer-Bursa / Türkiye  
 P: +90 224 219 18 00  
 F: +90 224 242 75 80  
 info@durmazlar.com.tr

www.durmazlar.com.tr

